

הגדרת חיבור מיוחד למשתמשי הטלפון הקווי של 012


לבעלי תשתית טלפון דרך מודם מיוחד של 012, יש לבצע את החיבורים וההגדרות הבאות:

חיבורים פיסיים

*חבר כבל רשת ראשון בין כניסת ה-WAN על הקופסא של 012 למודם הכבלים\ADSL שלך ליציאת ה-Ethernet.

*חבר כבל רשת שני מיציאת ה-LAN שעל הקופסא של 012 ליציאה שנקראת WAN על מכשיר האדימקס.

*את המחשבים חברו ליציאות LAN 1-4 על הראוטר.

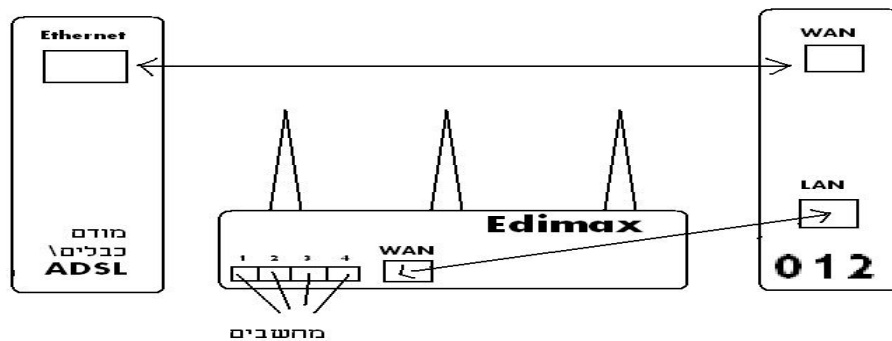


הגדרות


לחץ על WAN

The screenshot shows the Edimax router's web interface in a Windows Internet Explorer browser. The address bar shows 'http://192.168.2.1/index.asp'. The page title is 'Wireless Router'. The main navigation menu includes 'Quick Setup', 'General Setup', 'Status Info', and 'System Tools'. The left sidebar menu has 'System', 'WAN', 'LAN', 'Wireless', 'QoS', 'NAT', and 'Firewall'. The 'WAN' option is highlighted with a red box. The main content area is titled 'General Setup' and contains the following text: 'The Broadband router supports advanced functions like Virtual Server, Access Control, Hacker Attack Detection and DMZ. We highly recommend you keep the default settings.'

בתפריט הנ"ל בחר באפשרות Static IP Address ולאחר מכן לחץ על More Configuration

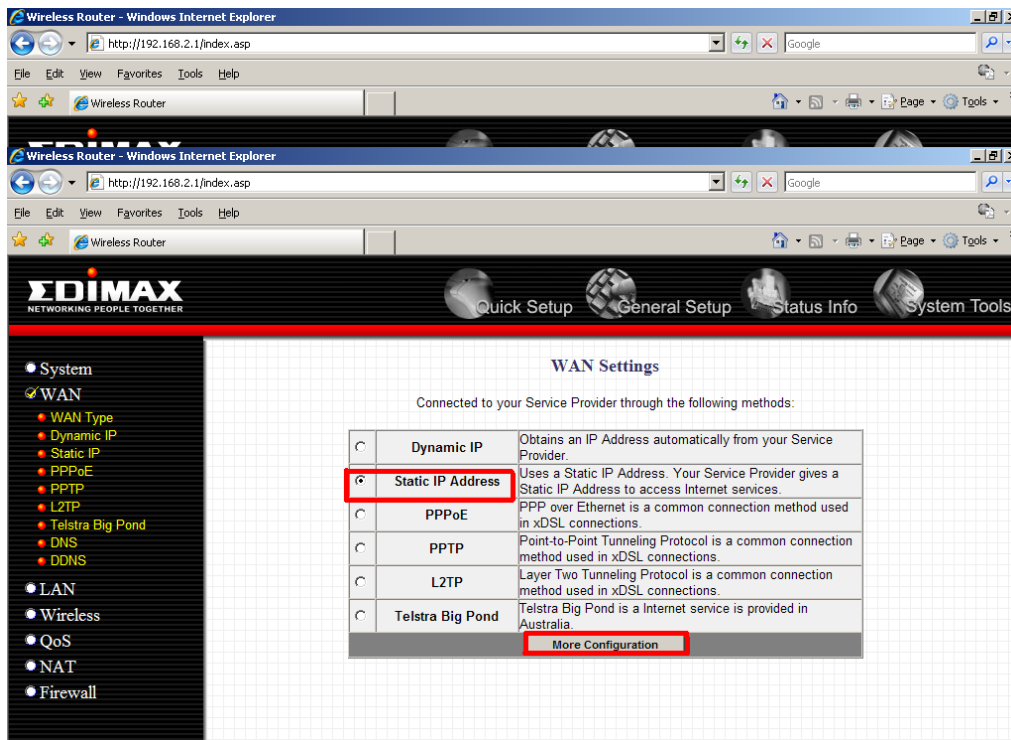

במסך הבא מלא את הפרטים הבאים בשורות להלן:
 IP address assigned by your Service Provider-10.100.101.100
 Subnet Mask-255.255.255.0
 Service Provider Gateway Address-10.100.101.1
 Apply לאחר מכן לחץ על Apply

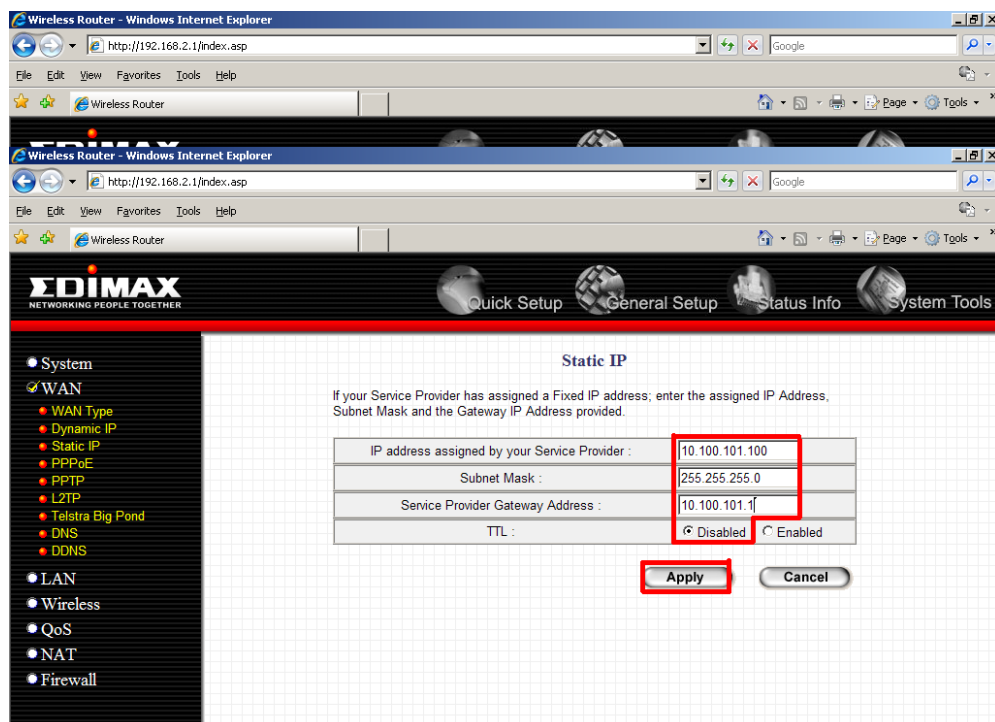

לחץ שוב על Apply

Settings saved successfully!

You may press CONTINUE button to continue configuring other settings or press APPLY button to restart the system for changes to take effect

המתן לסוף הספירה לאחור ..

System Restarting! Please wait.

לחץ על OK

System Restarting! Please wait.

כעת לחץ על Status Info

Wireless Router - Windows Internet Explorer

http://192.168.2.1/index.asp

EDIMAX NETWORKING PEOPLE TOGETHER

Quick Setup General Setup **Status Info** System Tools

Static IP

If your Service Provider has assigned a Fixed IP address, enter the assigned IP Address, Subnet Mask and the Gateway IP Address provided.

IP address assigned by your Service Provider :	10.100.101.100
Subnet Mask :	255.255.255.0
Service Provider Gateway Address :	10.100.101.1
TTL :	<input checked="" type="radio"/> Disabled <input type="radio"/> Enabled

- System
- WAN**
 - WAN Type
 - Dynamic IP
 - Static IP
 - PPPoE
 - PPTP
 - L2TP
 - Telstra Big Pond
 - DNS
 - DDNS
- LAN
- Wireless
- QoS
- NAT
- Firewall

עכשיו לחץ בצד שמאל על Internet Connection.

EDIMAX
NETWORKING PEOPLE TOGETHER

Quick Setup General Setup Status Info System Tools

Status

- Internet Connection
- Device Status
- System Log
- Security Log
- Active DHCP Client
- Statistics

Current Time
1/1/2000 0:23:07

Status and Information

You can use the Status page to monitor the connection status for the Broadband router's WAN/LAN interfaces, firmware and hardware version numbers, any illegal attempts to access your network, and information on all DHCP client PCs currently connected to your network.

System	
Model Name	Wireless Router
Uptime	0day:0h:23m:7s
Hardware Version	Rev. A
Boot Code Version	1.0
Runtime Code Version	1.57

http://192.168.2.1/stanet.asp

כעת תצטרך לקבל את הנתונים כמו בתמונה הבאה:

Internet Connection

View the current internet connection status and related information.

Attain IP Protocol :	Fixed IP connect
IP Address :	10.100.101.100
Subnet Mask :	255.255.255.0
Default Gateway :	10.100.101.1
MAC Address :	00:1F:1F:04:11:DA
Primary DNS :	168.95.1.1
Secondary DNS :	