


על מנת לבצע עדכון גירסא בקסדה:

התיקון: נפילות ברשת האלחוטית

http://www.nglltd.co.il/wp-content/uploads/2016/09/KW52285_update_151216.dat

***להוריד את הקובץ המצורף למחשב ולזכור באיזו תיקייה שמרתם אותו.**

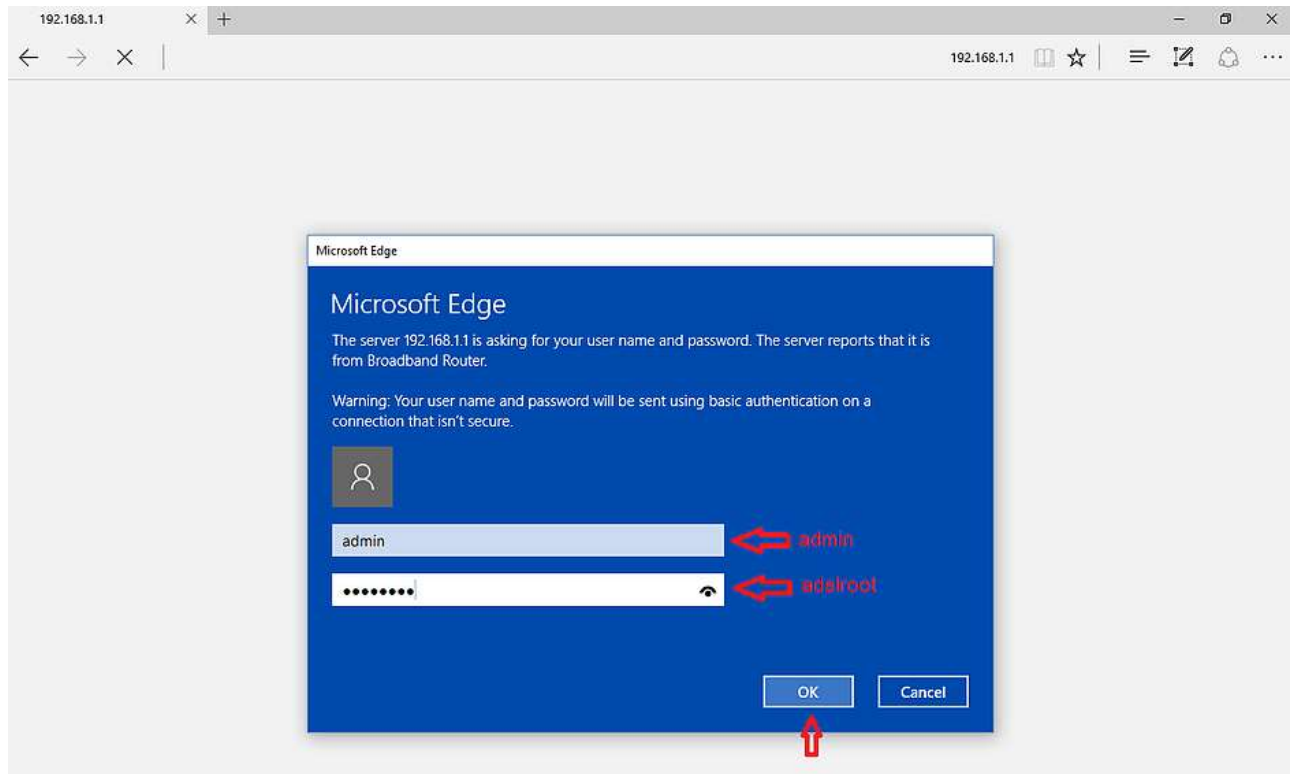

לבחור ב advance setup

Please select Wizard or Advanced mode

The Wizard setup walks you through the most common configuration settings. We suggest you use this mode if it is the first time you are setting up your router or if you need to make basic configuration changes.

Use Advanced mode if you need access to more advanced features not included in Wizard mode.

Go to Wizard setup

Go to Advanced setup

Click here to always start with the Advanced setup.


Apply

Exit




לאחר מכן בתפריט השמאלי יש לבחור בתחתית בmanagement ובתוך זה בupdate software

The screenshot shows a web browser window with the URL 192.168.1.1/main.html. The page title is "Broadband Router & Gateway". The left sidebar contains a navigation menu with the following items: Device Info, Quick Setup, Advanced Setup, Wireless, Diagnostics, Management, Settings, System Log, Security Log, SNMP Agent, TR-069 Client, Internet Time, Access Control, Update Software (highlighted with a red arrow), and Reboot. The main content area is titled "Settings - Backup" and contains the text "Backup Broadband Router configurations. You may save your router configurations to a file on your PC." and a "Backup Settings" button.

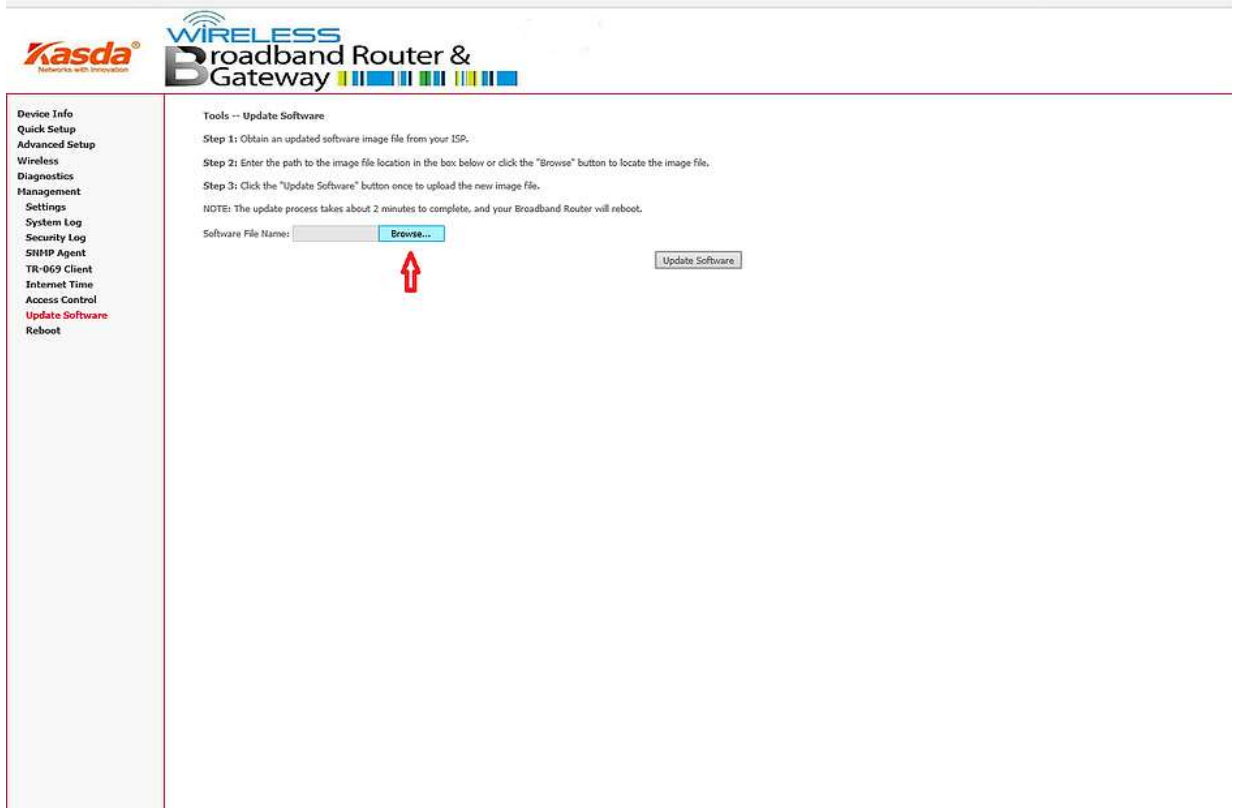

ושם לטעון את הקובץ שהורדתם (שכרגע נמצא על המחשב שלכם)

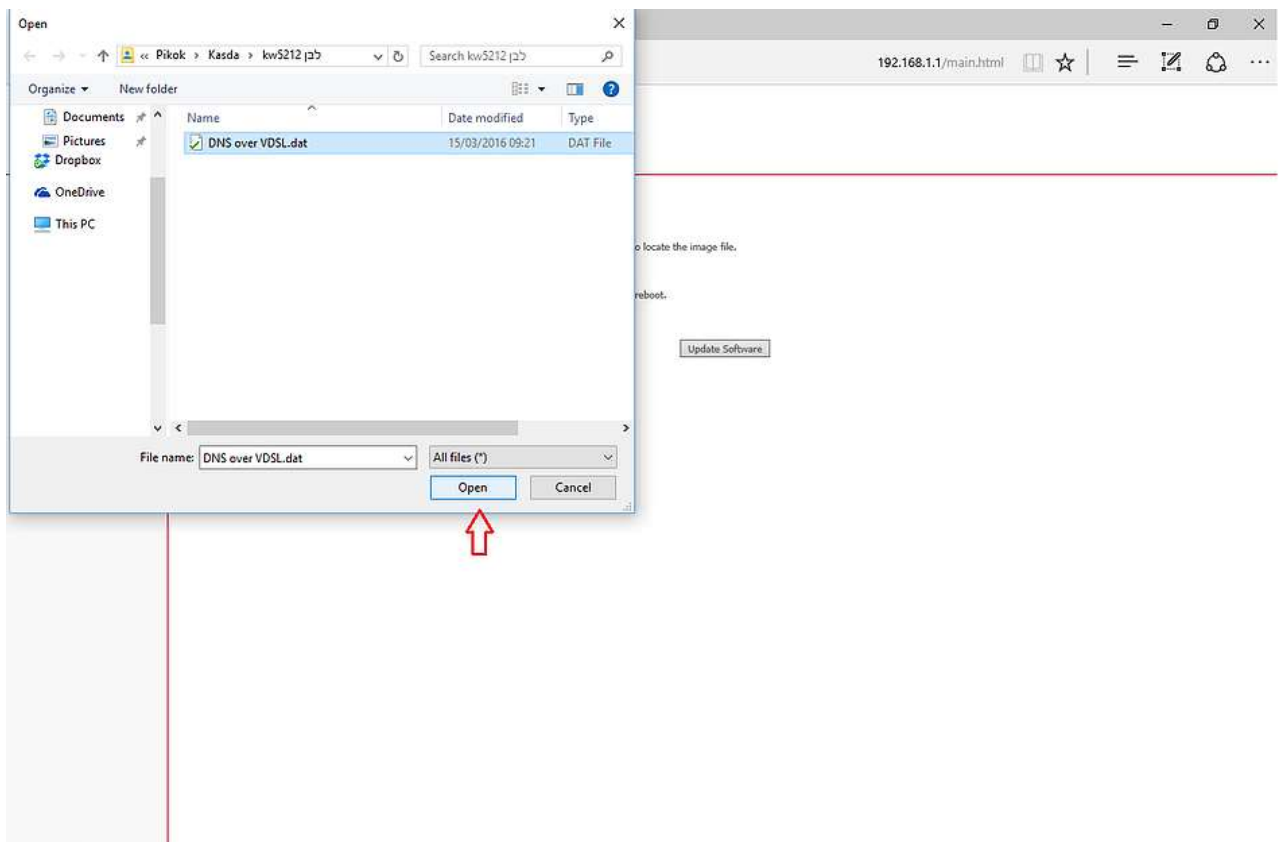

ולאחר שטענתם את הקובץ ללחצוץ על update software (תהליך העדכון יערך כ-2 דקות).

Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
Settings
System Log
Security Log
SNMP Agent
TR-069 Client
Internet Time
Access Control
Update Software
Reboot



Broadband Router Update

Uploading is in progress. The Broadband Router will reboot upon completion. This process will take about 2 minutes.

[Back](#)

לאחר סיום העדכון להגיע לאותו התפריט ושם לאפס את המוצר לנתוני יצרן

בתוך management יש תפריט נוסף של setting ובתוכו ישנה אפשרות ל. restore default (תהליך האיפוס ייערך כ-2 דקות)

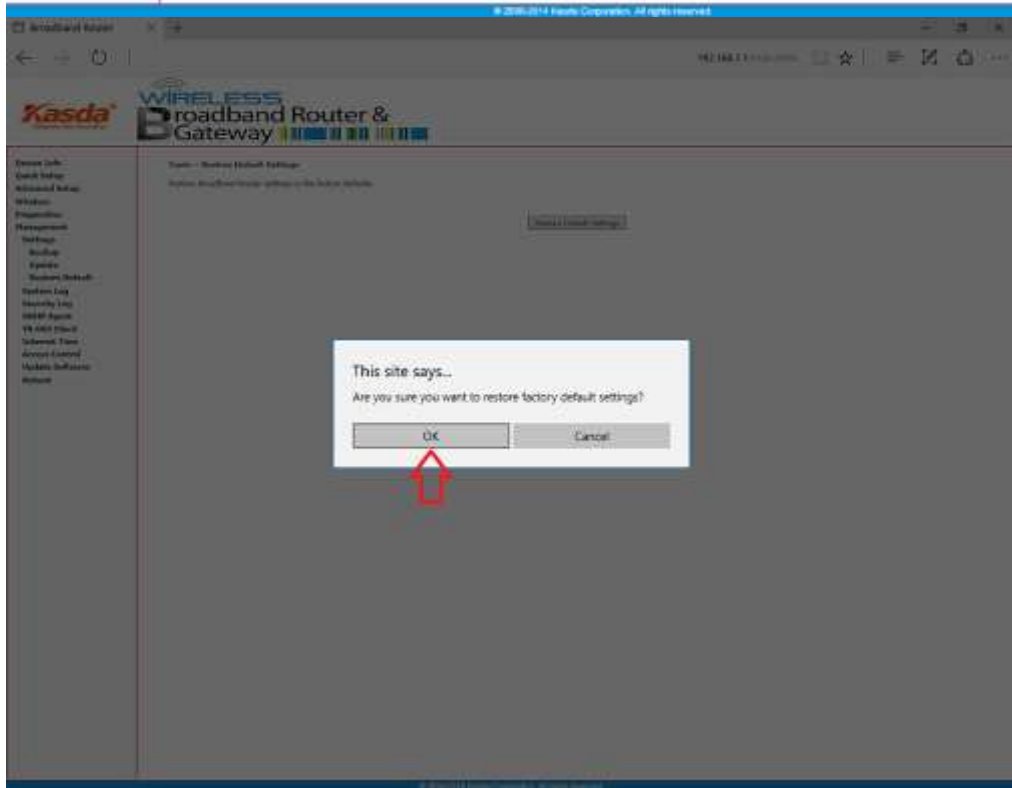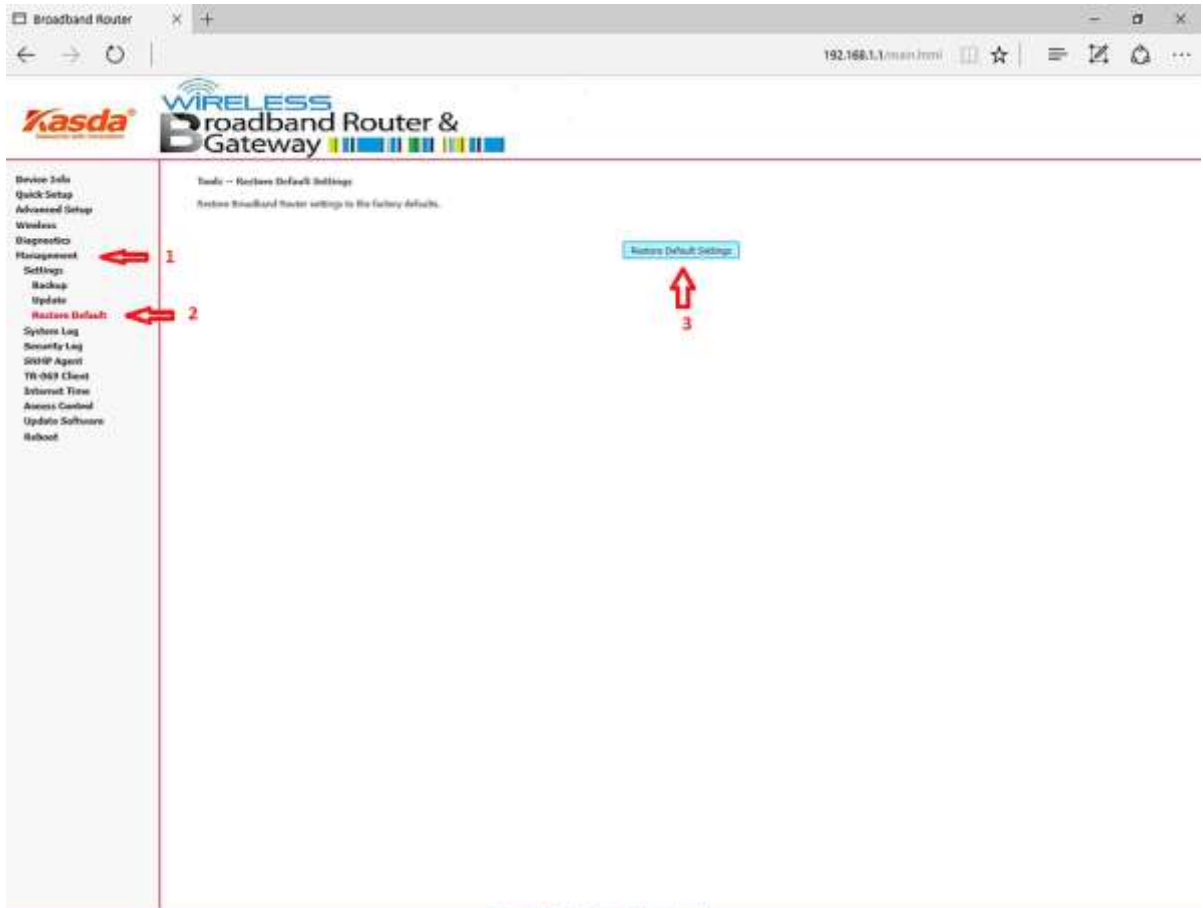



Please select Wizard or Advanced mode

The Wizard setup walks you through the most common configuration settings. We suggest you use this mode if it is the first time you are setting up your router or if you need to make basic configuration changes.

Use Advanced mode if you need access to more advanced features not included in Wizard mode.

- Go to Wizard setup
- Go to Advanced setup
- Click here to always start with the Advanced setup.


Apply Exit



© 2000-2014 KASDA Corporation. All rights reserved.

הגדרות למהירות עד 15 מגה:

להתקין את המודם בשיטת ADSL OVER ATM

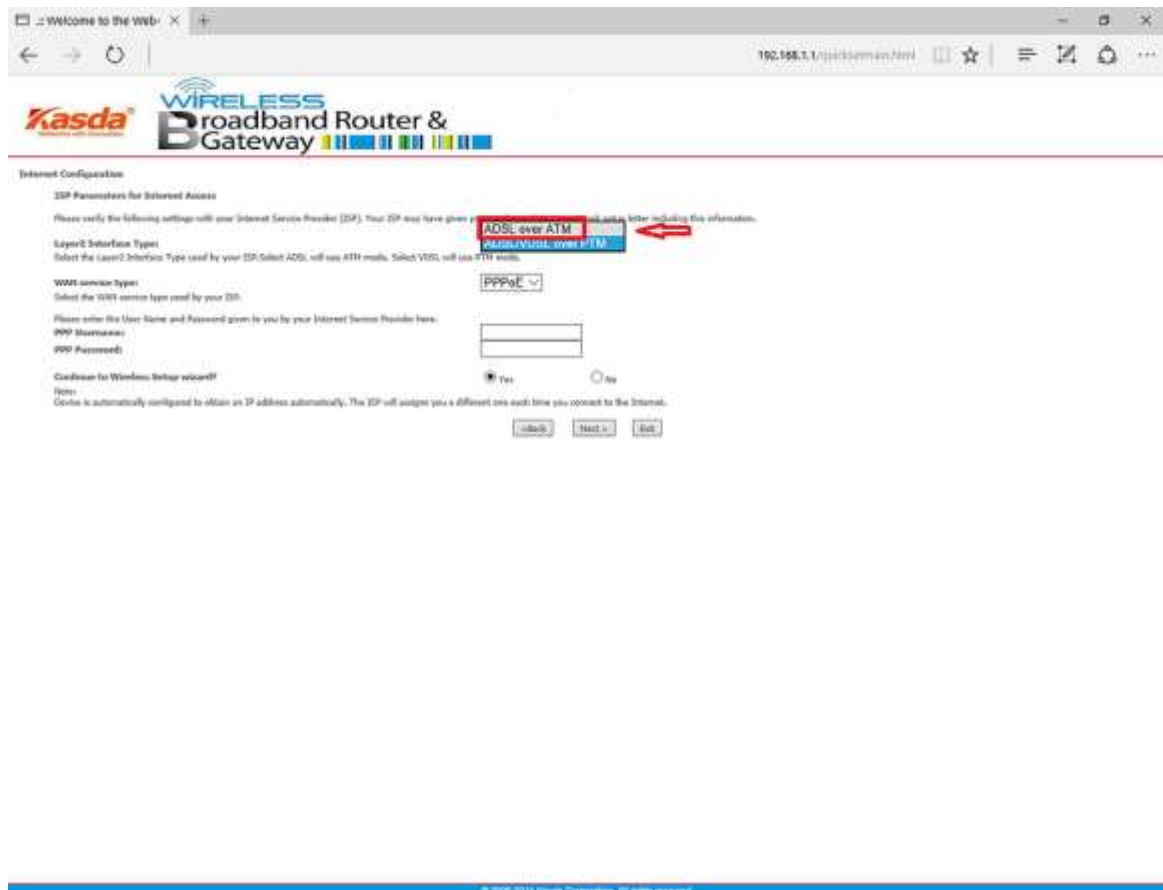

ואז יפתחו 2 חלונות של VPI VCI

איפה שרשום 0 להכניס 8

איפה שרשום 35 להכניס 48

ולהזין את השם משתמש כמובן '@' אחרי השם משתמש וסיסמא כפי שקבלתם מספק האינטרנט



Internet Configuration

ISP Parameters for Internet Access

Please verify the following settings with your Internet Service Provider (ISP). Your ISP may have given you a welcome letter or network setup letter including this information.

Layer2 Interface Type:

Select the Layer2 Interface Type used by your ISP. Select ADSL will use ATM mode. Select VDSL will use PTM mode.

ADSL over ATM

WAN service type:

Select the WAN service type used by your ISP.

PPPoE

Virtual Circuit ID

VPI: [0-255]

VCI: [32-65535]

Select the VPI (Virtual Path Identifier) and VCI (Virtual Channel Identifier) used by your ISP.

8 ← החליף ל 8
48 ← החליף ל 48

Please enter the User Name and Password given to you by your Internet Service Provider here.

PPP Username:

ido123@018

PPP Password:

שם משתמש
סיסמה

Continue to Wireless Setup wizard?

Note:

Device is automatically configured to obtain an IP address automatically. The ISP will assign you a different one each time you connect to the Internet.

Yes No

<Back Next > Exit





Wireless LAN

Wireless Parameters for Lan Access

Enable Wireless

Network Name(SSID)

Give your network a name. You will search for this name from your wireless clients.

KasdaD9E31A

להזין שם לרשת האלחוטית

Channel Selection:

Your router can use one of several channels. You should use the default channel unless other wireless networks nearby use the same channel.

Auto

Encryption:

Use this option if you would prefer to create your own key. WPA2-PSK is stronger than WEP but not all devices are compatible with WPA2-PSK.

Manually assign a WPA2-PSK key

Pre-Shared Key

להזין סיסמה לרשת האלחוטית

1234567890

(example:1234567890)

WPA2-PSK Encryption: WPA Key should be between 8 and 63 ASCII characters or 64 hexadecimal digits.

<Back Next > Exit





CONGRATULATIONS

The Internet/Wireless Setup configuration is complete. Here are your current settings:

Internet Settings

Layer2 Interface Type:	ADSL/VDSL over PTM
WAN service type:	PPPoE
PPP Username:	idol123@018
PPP Password:	xxxxxxxx

Wireless LAN Settings

Network Name(SSID):	KasdaD9E31A
Channel Selection:	Auto
Encryption:	Manually assign a WPA2-PSK key
Network Key(WPA/WEP Key):	1234567890

Press "Apply/Save" button to finish this wizard configuration , or give up the config and click the following link to open other pages.

- [Return to Wizard Main Page](#)
- [Go to Advanced Setup Page](#)



אחרי הכל APPLY/SAVE

הגדרות למהירות 40-100 מגה:

להתקין את המודם בשיטת ADSL / VDSL over PTM

192.168.1.1/quicksetmain.html

Kasda WIRELESS Broadband Router & Gateway

Internet Configuration

ISP Parameters for Internet Access

Please verify the following settings with your Internet Service Provider (ISP). Your ISP may have given you a welcome letter or network setup letter including this information.

Layer2 Interface Type: ADSL/VDSL over PTM

Select the Layer2 Interface Type used by your ISP. Select ADSL will use ATM mode. Select VDSL will use PTM mode.

WAN service type: PPPoE

Select the WAN service type used by your ISP.

Please enter the User Name and Password given to you by your Internet Service Provider here.

PPP Username: idot123@018 **שם משתמש**

PPP Password: ***** **סיסמה**

Continue to Wireless Setup wizard?

Yes No

Note:
Device is automatically configured to obtain an IP address automatically. The ISP will assign you a different one each time you connect to the Internet.

<Back Next > Exit

↑

זה הכל! בכל שאלה, אתם מוזמנים לפנות למוקד התמיכה שלנו בטלפון: 09-7601346